


## JLSZV-35W 3P4W

Current Transformer

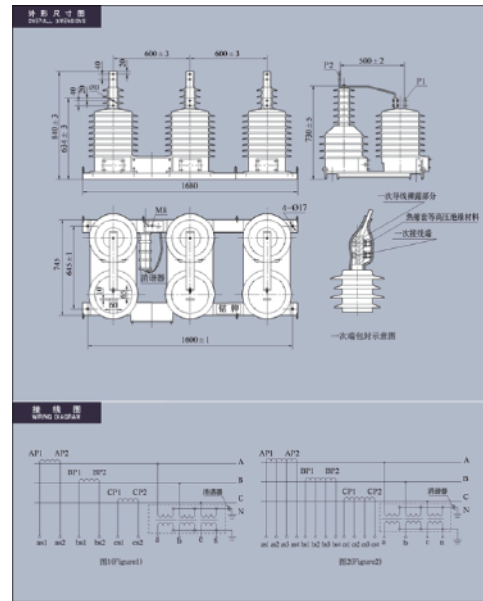

### Parameters of voltage part

Rated voltage ratio(V)	Accuracy class combination and rated secondary output(VA)	Limited output(VA)	Rated insulation level(KV)	Surface creepage distance (mm)	Weight (KG)
$\frac{35000}{\sqrt{3}} \frac{100}{\sqrt{3}}$	0.2---3×30 0.5---3×90 1---3×180 3---3×500	3×600	40.5/95/200	1300	500
$\frac{35000}{\sqrt{3}} \frac{100}{\sqrt{3}} \frac{100}{\sqrt{3}}$	0.2/0.2---3×15/3×15 0.2/0.5---3×15/3×20 0.5/0.5---3×45/3×45	3×300/3×300			

